
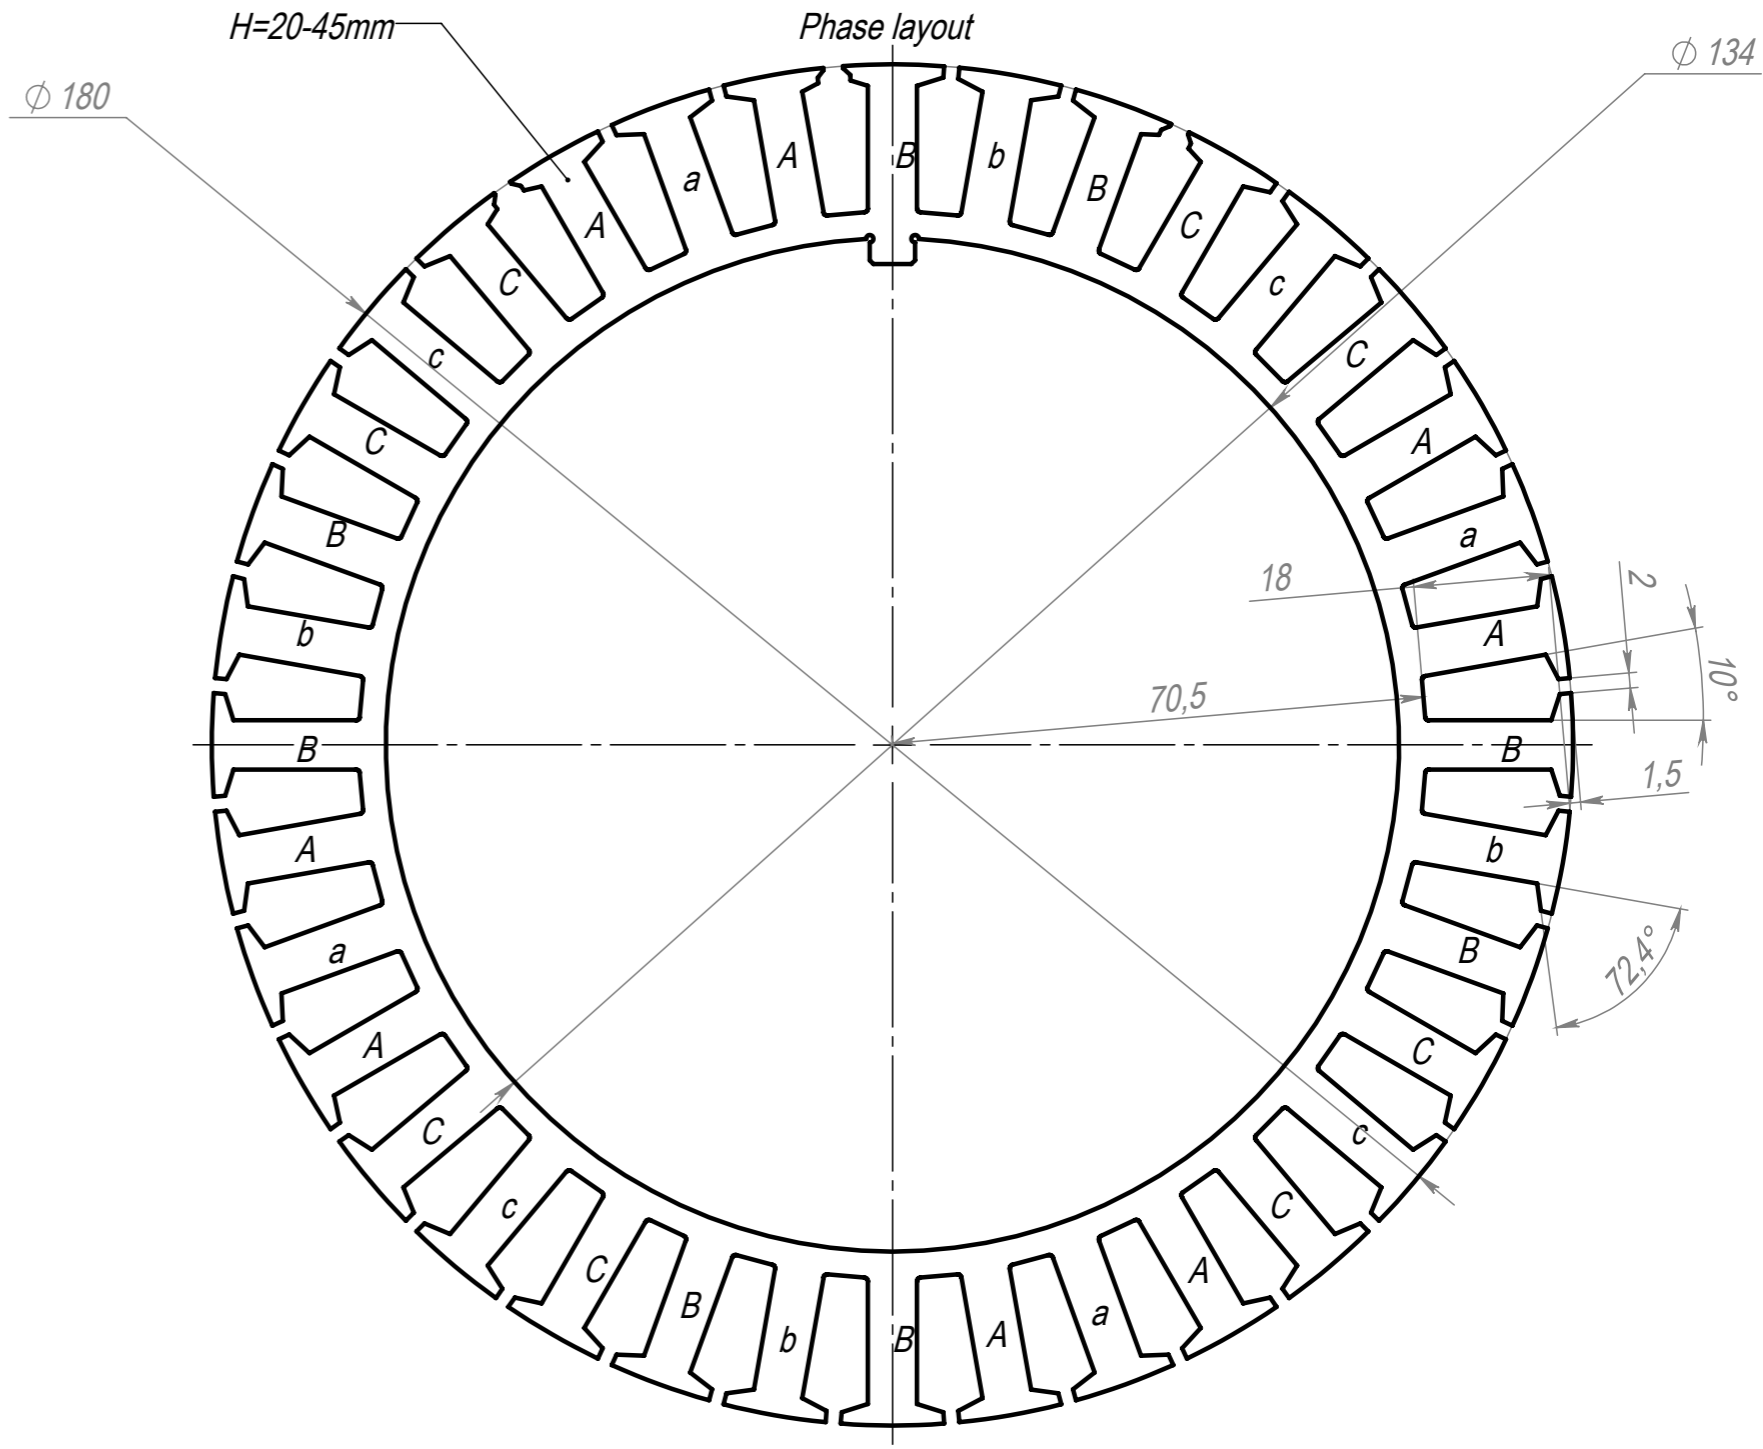


Перв. примен.
Справ. №
Подп. и дата
Изм. № дубл.
Взам. инв. №
Подп. и дата
Изм. № подл.

Pic. 1

AaABbBCCcCAaABbBCCcCAaABbBCCcCAaABbBCCc

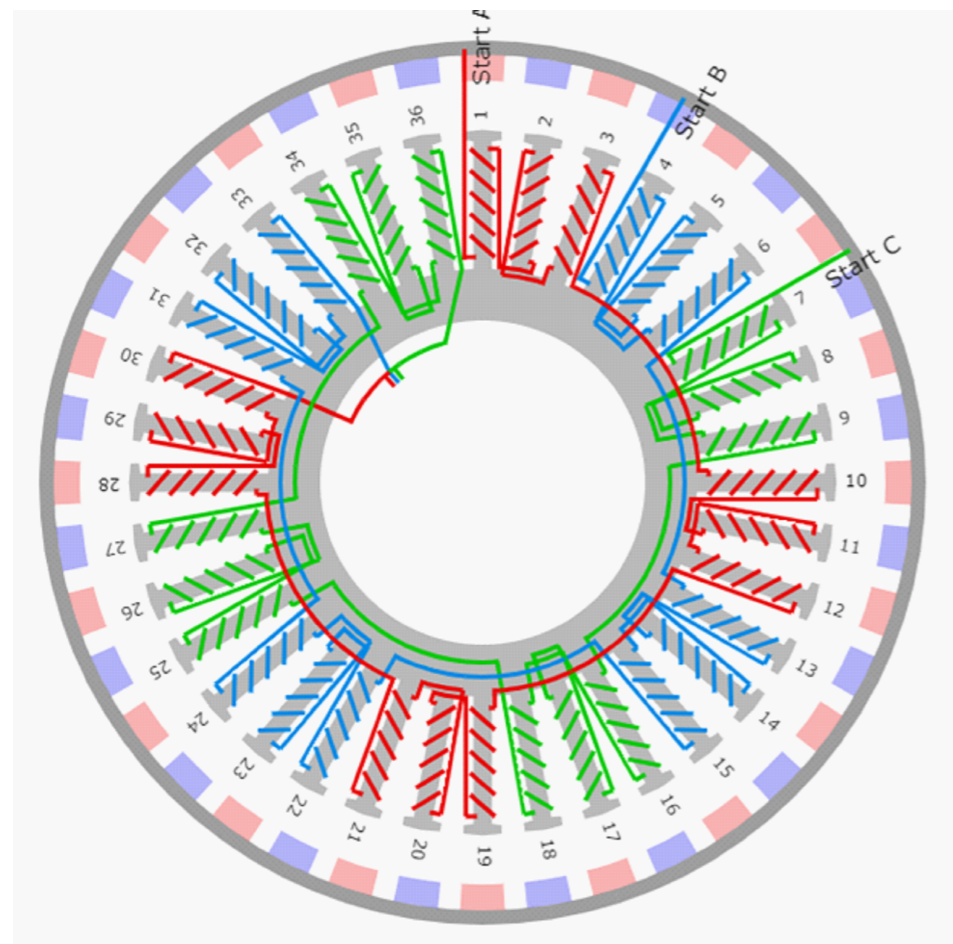

Coil data	
Wire diameter, mm	0,45
Wire diameter with isolation, mm	0,516
Number of turns, pcs.	5
Number os strands in hand, pcs.	27

- 1 Output of the ends in the center of the stator, from the side of the pressure ring.
- 2 The location of the connection in the star under the slots for Hall sensors is not allowed.
- 3 The position of the phases in relation to the slots for Hall sensors according to the scheme.
- 4 The height of the front parts of the winding over the end of the package is not more than 15 mm.

Изм.	Лист	№ докум.	Подп.	Дата	Лит.	Масса	Масштаб
Разраб.							1:5
Пров.							
Т. контр.					Лист	Листов 1	
Н. контр.							
Утв.							
Шифр:							